

Featuring Nichia LEDs, and PCBs with 3oz Copper Traces for even better thermal management, our Flexible Linear White LED Lighting is available in 12 V DC or 24 V DC, with CCTs ranging from 2000K to 6000K, and configurations from 9 LEDs/ft. (30 LEDs/M) to 36 LEDs/ft. (120 LEDs/M.) Direct mounting via attached enhanced 3M Thermal Dissipating Tape. Available in IP20, IP67 and IP68.


LED pitch and Lumen output can be customized.




Features:

LEDs/ft	9	18	36
LEDs/M	30	60	120
Lm/ft	257	514	1006
Lm/M	844	1686	3302
Power Consumption (W/ft.)	1.84	3.65	7.41
Power Consumption (W/M)	6.05	11.98	24.34
CRI	> 90	> 90	> 90
Operating Voltage (DC)	24/12	24/12	24/12
Operating Temp Range (°C)	-40°C - 100°C		

- **UL LISTED**
- **CLASS 2**
- **LM80 >80,000 HRS**
- **HEAVY WEIGHT COPPER TRACES FOR ENHANCED THERMAL DISSIPATION**



WHITE

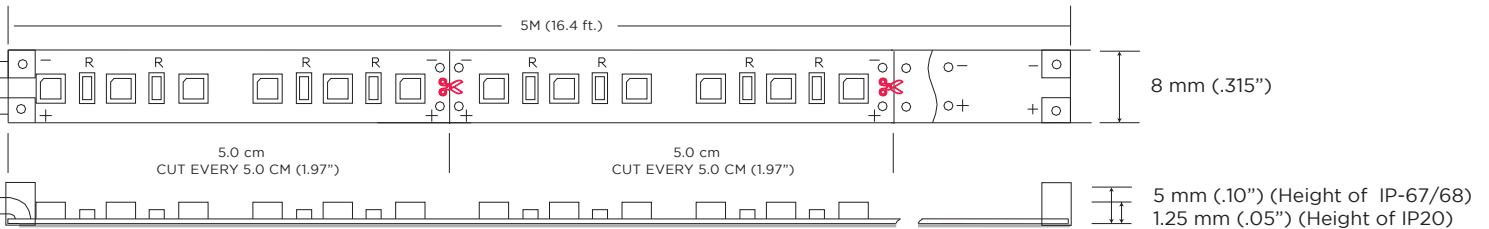

Order Codes:

MLS	VDC	LED PKG	CCT	CRI	IP	LEDs/M	W/M	Length (")	Length (cm)
<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>
								<i>specify in inches</i>	<i>specify in centimeters</i>
MLS	12	3030 (WHITE)	6500	> 90	20	30	6		
	24		5700	> 90	67	60	12		
			5000	> 90	68	72	14.4		
			4500	> 90		96	19.8		
			4000	> 90		120	24		
			3500	> 90					
			3000	> 90					
			2700	> 90					
			2550	> 90					
			2250	> 80					
		2000	> 80						

Photometrics, and additional spec. info is available upon request.

